



N SERIES

5.0T - 7.0T

HEAVY DUTY DIESEL FORKLIFTS

UN forklifts are designed to excel in the most challenging environments with increased safety, enhanced cooling systems, reduced noise and vibration all with low maintenance. With refined performance at an affordable price, UN Forklifts reduce the total cost of ownership and provide reliable and efficient solutions to drive productivity in your operations.











MODEL		5.0T	6.0T	7.0T				
GENERAL SPECIFICATIONS								
Power Type		Diesel	Diesel	Diesel				
Load Capacity	Т	5.0T	6.0T	7.0T				
Load Capacity	Q(kg)	5000	6000	7000				
Load Centre	C(mm)	600	600	600				
CHARACTERISTICS & DIMENSION								
Rated Lift Height	H3(mm)	3000	3000	3000				
Free Lift Height	H2(mm)	152	152	152				
Fork Size (LxWxT)	mm	1220x150x60	1220x150x60	1220x150x65				
Mast Tilt Angle (F/R, a°/β°)	deg	6°/12°	6°/12°	6°/12°				
Fork Overhang (Wheel Center to Fork Face)	X1(mm)	585	585	585				
Rear Overhang	X2(mm)	640	640	720				
Ground Clearance (Bottom of mast)	H7(mm)	200	200	200				
Length to Face of Fork (Without Fork)	L1(mm)	3510	3510	3590				
Overall Width	B1(mm)	1996	1995	1996				
Mast Lowered Height	H1(mm)	2515	2515	2165				
Mast Extended Height (With Backrest)	H4(mm)	4437	4437	4437				







Market leading engines ensure superior performance, durability and excellent fuel efficiency. All diesel forklifts have Mitsubishi or Isuzu engines. The LPG and gasoline forklifts utilise Nissan engines.





MODEL		5.0T	6.0T	7.0T			
PERFORMANCE							
Overhead Guard Height	H5(mm)	2445	2445	2445			
Turning Radius (Outside)	Wa(mm)	3260	3280	3340			
Min.Aisle width for pallets	Asl(mm)	5285	5285	5365			
Travel Speed (No Load)	km/h	23/21	23/21	23/21			
Lifting Speed (No Load/Full Load)	mm/sec	530/500	530/500	530/490			
Lowering Speed (No Load/Full Load)	mm/sec	≥300 / ≤600	≥300 / ≤600	≥300 / ≤600			
Max.Drawbar Pull (Full Load)	KN	53	53	52			
Max.Gradeability (Full Load)	%	32	27	24			
CHASSIS							
Tyre (Front x 4)	mm	8.25-15-14PR	8.25-15-14PR	8.25-15-14PR			
Tyre (Rear x 2)	mm	8.25-15-14PR	8.25-15-14PR	8.25-15-14PR			
Front Tread	mm	1470	1470	1470			
Rear Tread	mm	1700	1700	1700			
Wheelbase	Y(mm)	2250	2250	2250			
WEIGHT							
Total Weight	kg	7980	8640	9350			
Front Axle Weight Distribution (Full Load)	kg	11660	13050	14570			
Rear Axle Weight Distribution (Full Load)	kg	1320	1590	1780			
Front Axle Distribution (No Load)	kg	4010	3860	3860			
Rear Axle Weight Distribution (No Load)	kg	3970	4760	5490			
POWER & TRANSMISSION							
Battery	V/Ah	24/90	24/90	24/90			
Fuel Tank Capacity	L	120	120	120			
Transmission Type		Powershift	Powershift	Powershift			
Transmission Stage (FWD,RVS)		2/2	2/2	2/2			
Operating Pressure (For Attachments)	Мра	20	20	20			








Market leading engines ensure superior performance, durability and excellent fuel efficiency. All diesel forklifts have Mitsubishi or Isuzu engines. The LPG and gasoline forklifts utilise Nissan engines.





MODEL		5.0T	6.0T	7.0T		
EXTRAS INCLUDED						
Side-Shift	•	•	•	•		
Fork postioner	•	•	•	•		
Solid Non-Marking Tyres	•	•	•	•		

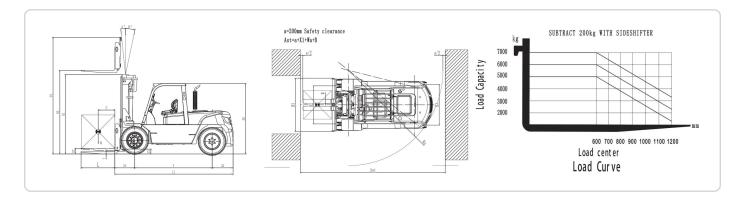







Market leading engines ensure superior performance, durability and excellent fuel efficiency. All diesel forklifts have Mitsubishi or Isuzu engines. The LPG and gasoline forklifts utilise Nissan engines.